


Features

- Extruded aluminium and die-cast aluminium housing
- DuPont Outdoor UV resistant powdercoat finish
- Stainless steel fasten screws / Integral gear
- Fire-resistant silicone seal waterproof gasket
- 4mm thick PMMA diffuser



Applications

- Lawn
- Garden
- Square
- Residential area
- Park

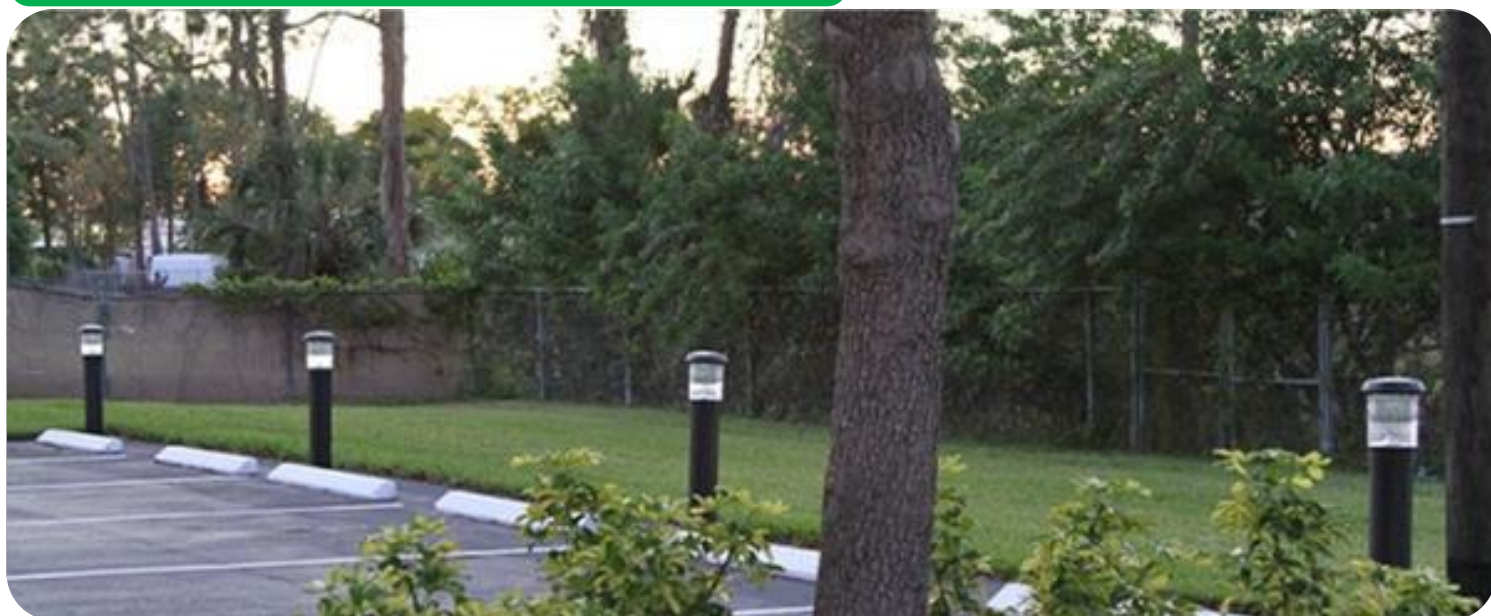

Specifications

Power	1x20W/30W
Input Voltage	AC 220~240V 50/60Hz
CCT	3000K, 4000K, 5000K
Color Rendering Index	80
Luminaire Efficacy	40lm/W (3000K), 45lm/W (4000K), 50lm/W (5000K)
LED Source Efficacy	115lm/W (3000K), 130lm/W (4000K), 130lm/W (5000K)
LED Source	CREE
LED Life Span	50,000 Hours at Ta=25°C
Operating Temperature	-30°C~50°C
Operating Humidity	0~99% RH
Finishing Materials	Stainless steel
IP Rating	IP65
Body Color	Black / Grey

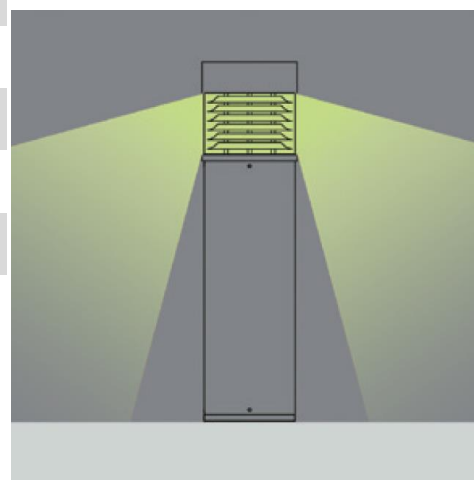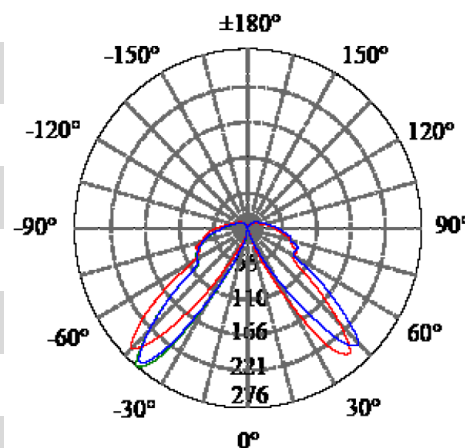

Ordering Part No.

Brand Name	Lighting Type	Power	Color Temperature	Series Name	Height	Body Color	Dimming Control
CE: CELEX	BLL: Bollard Light	20W 30W	W: 3000K N: 4000K D: 5000K	All: Apollo II Series	A: 1000mm B: 700mm	B: Black G: Grey	N: Switch In (ON/OFF) V: 1~10V Dimming
CE	BLL	20W	W	All	A	B	N